
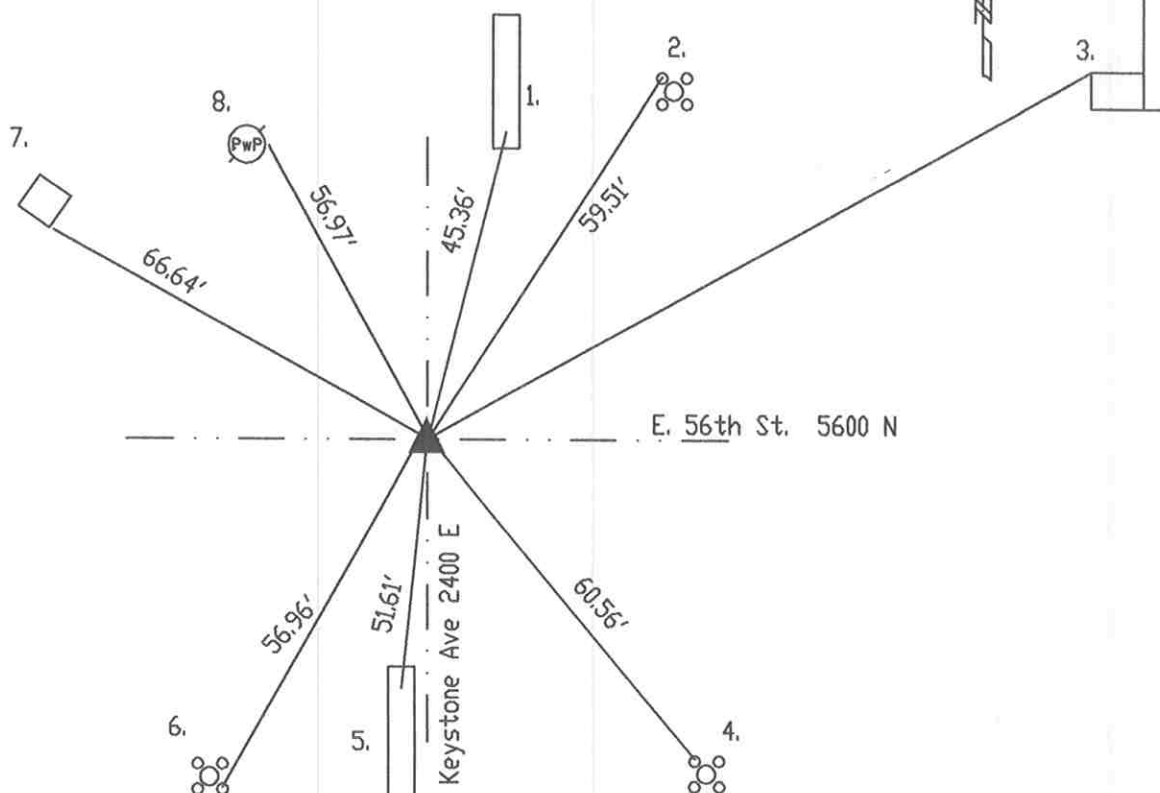


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 8 TOWNSHIP 16 RANGE 4
DATE: --4-8-98-- 8-1-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 3-10-92

IN. S.P.C. E ZONE, NAD 83
NAME: 16040801
N: 511514.8560(m)
E: 61026.7830(m)

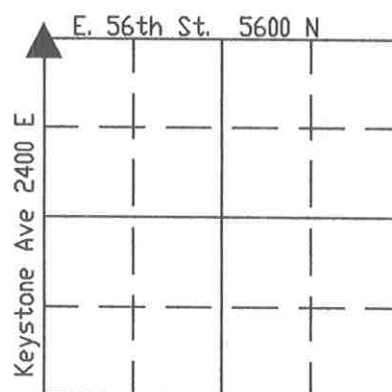

Original post set 1820 by Hendricks with witnesses: 8" maple N 48 W 39 links, 12" elm S 32 E 13 links per Marion County Atlas pg. 11. Coyner 11-27-1894 called stone and witness per Washington Township Legal Survey Book pg. 47. Cathcart 2-24-53 called nail w/small washer. Monroe 3-10-58 called same. Hankins 2-25-59 called brass plug. Wilcoxon MCSO 11-21-75 called same. Gries 8-20-87 called same. Wilcoxon 3-10-92 excavated corner and set Harrison. Re-tied 4-8-98.

HC640801

REF.	DISTANCE	DESCRIPTION
1.	45.36'	Cut 'x' S-end median
2.	59.51'	Cut 'x' NW bolt
3.	107.95'	Corner of brick sidewalk
4.	60.56'	Cut 'x' NW bolt
5.	51.61'	Cut 'x' N-end median
6.	56.96'	Cut 'x' SE bolt
7.	66.64'	Southerly corner of signal box
8.	56.97'	PK E PwP#87-933 2'up